PROPERTY OF DEMAG CRANES AND COMPONENTS CORPORATION. THIS PRINT OR DRAWING IS CONFIDENTIAL AND IT OR ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST. IT IS NOT TO BE COPIED REPRODUCED OR EXHIBITED TO OUTSIDE PARTIES, BUT IT IS TO BE USED ONLY WITH REFERENCE TO CONTRACTS OR PROPOSALS OF THIS CORPORATION. NOTHING DISCLOSED HEREIN NOT PUBLICLY AVAILABLE MAY BE USED WITHOUT WRITTEN PERMISSION.

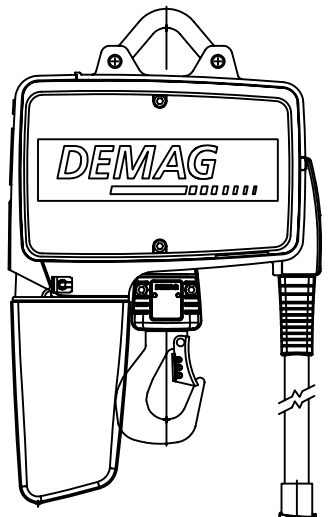

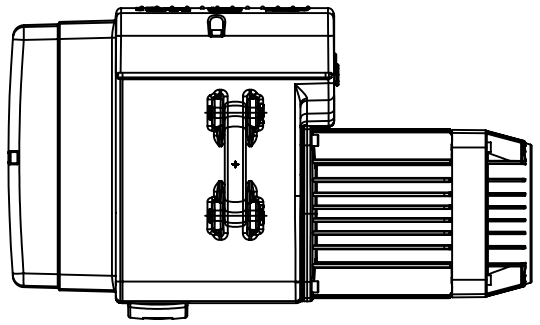

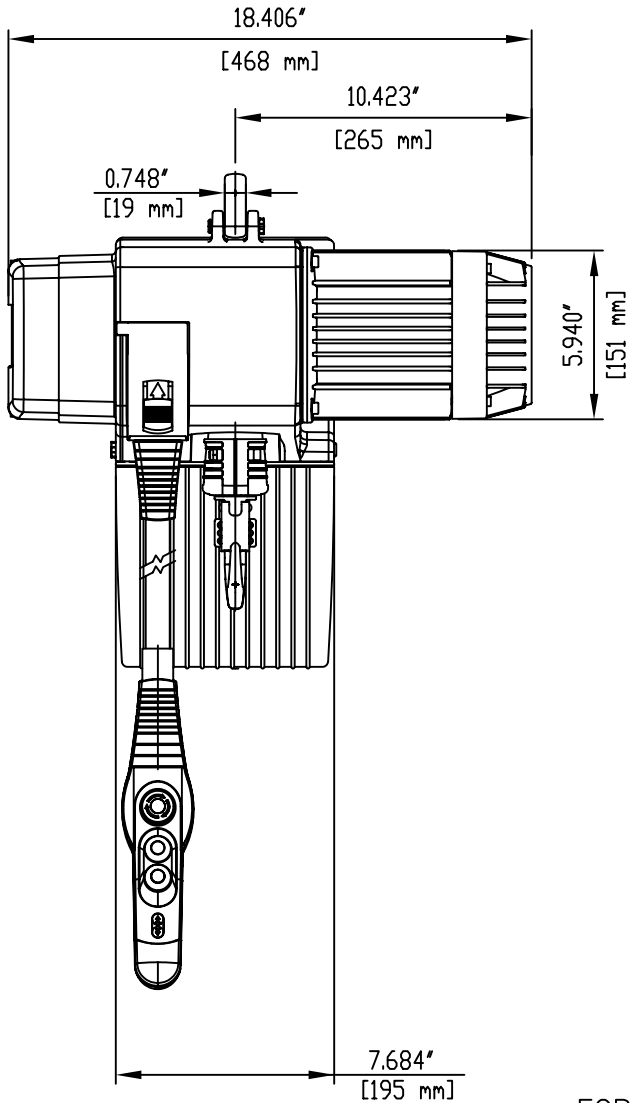

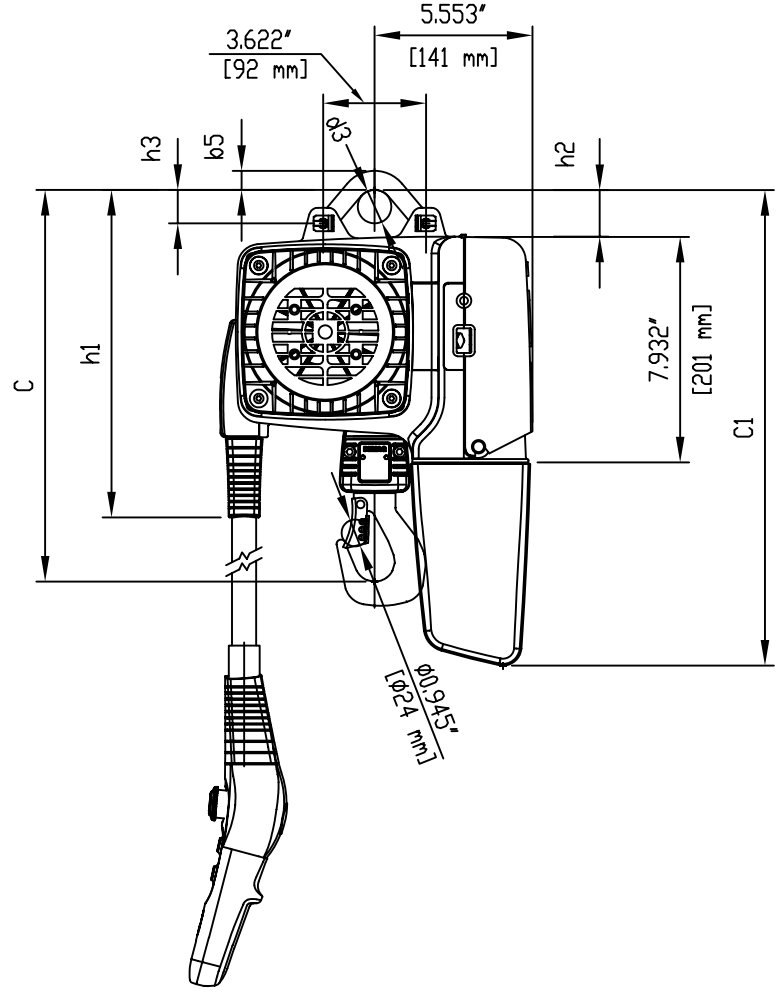

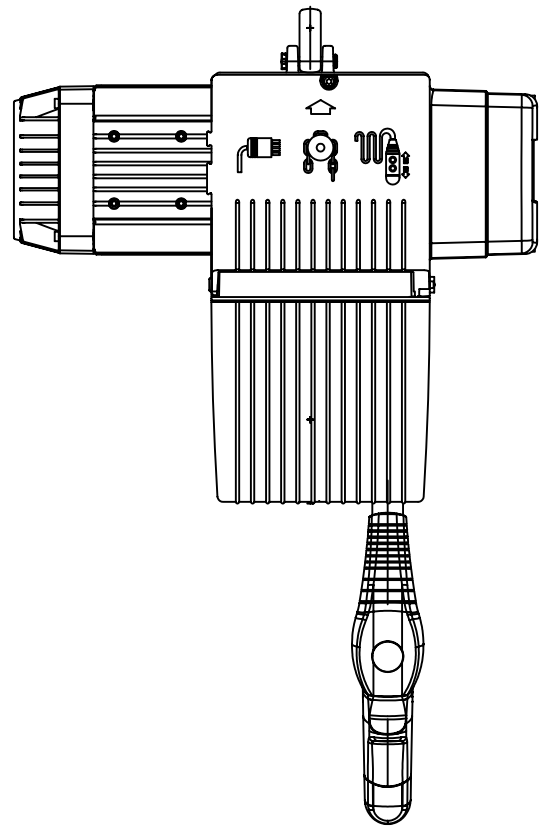

MODEL: DC Pro 5-250 H8 V2 460/60

CAPACITY:	550 LBS [250 kg]
LIFT:	26 FT
LIFT SPEED:	48/12 FPM
SUPPLY VOLTAGE:	460/3/60
CONTROL VOLTAGE:	24V
HOIST MOTOR:	ZNK80A8/2
STARTING AMPS	2.7/12.6
FULL LOAD AMPS:	1.3/2.9
HOIST WEIGHT:	66 LBS [30 kg]

HOIST DIMENSIONS*

SHORT SUSPENSION EYE			LONG SUSPENSION EYE		
VALUE	INCHES	mm	VALUE	INCHES	mm
b5	0.67	17	b5	0.63	16
C	12.01	305	C	13.50	343
C1	16.73	425	C1	18.31	465
d3	1.18	30	d3	1.77	45
h1	11.54	293	h1	12.72	323
h2	1.57	40	h2	3.07	78
h3	1.18	30	h3	2.68	68

* DRAWING SHOWS HOIST WITH SHORT EYE

FOR ADDITIONAL DETAILS, REFER TO THE FOLLOWING DOCUMENTS
IDENT # 90042649 - OPERATING INSTRUCTIONS & SPARE PARTS
IDENT # 90043249 - TECHNICAL DATA

MANUFACTURER: DEMAG CRANES & COMPONENTS
29201 AURORA ROAD
SOLON, OHIO 44139

MICRO FILM	REV. RECORD			
	0	DATE	INITIAL	DESCRIPTION OF REVISION

DEMAG Cranes & Components

TOLERANCES, UNLESS OTHERWISE SPECIFIED:
STRUCTURAL FRAMES +/- 0.125"
MACHINED PARTS +/- 0.01"
ANGULAR DIMENSIONS +/- 30'
ALL MACHINED SURFACES TO BE 125
DIA. MARKED TO BE CONCENTRIC WITHIN 0.003" T.I.R.

	DATE	INITIALS
DRAWN		
CHECKED		
APPR.		
SCALE:		
DEPT. CODE		

DESCRIPTION: DC Pro 5-250 H8 V2 460/60
TYPE: 1/1 REEVED, LUG MOUNTED

QUOTE NO.:

ORDER NO.

IDENT-NO. 93008146 SK AZ

F 3 | U.A. | S E | SHT. / OF

ORIGINATED FROM: | REPLACEMENT FOR: | REPLACED BY: